

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L1	14	(source near4 object near4 HTML near4 (program file))	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 20:13
L2	958	SQL same html	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 20:13
L3	26	SQL same html same insert	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 20:13
L4	22	SQL same html same insert same statement	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 20:13
S1	10	(insert\$4 adj4 statement) same (source adj2 code adj2 file)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 21:55
S2	2	S1 same database	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/07 16:46
S3	15	(insert\$4 near4 statement) same (source adj2 code adj2 file)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/07 17:09
S4	5	((("5940834") or ("5835712") or ("5983227") or ("6256032") or ("20030093399"))).PN.	US-PGPUB; USPAT	OR	OFF	2004/12/08 11:38
S5	0	statement same (logical near6 (condition and paremeter)) same state	USPAT	OR	OFF	2004/12/14 18:45

S6	0	statement same (logical near6 (condition and paremeter)) same state	USPAT	OR	ON	2004/12/08 11:39
S7	0	statement same (logical near6 (condition and paremeter)) same state	US-PGPUB; USPAT	OR	ON	2004/12/08 11:39
S8	20	statement same (logical near6 (condition or paremeter)) same state	US-PGPUB; USPAT	OR	ON	2004/12/08 11:41
S9	13	statement same (logical near6 (condition or parameter)) same state	USPAT	OR	ON	2004/12/08 11:41
S10	1	statement same (logical near6 (condition and parameter)) same state	USPAT	OR	ON	2004/12/08 11:43
S11	1	statement same ((logical near6 (condition and parameter)) and state)	USPAT	OR	ON	2004/12/08 11:44
S12	0	statement near8 ((logical near6 (condition and parameter)) and state)	USPAT	OR	ON	2004/12/08 11:44
S13	1	statement near8 ((logical near6 (condition and parameter)) and state)	US-PGPUB; USPAT	OR	ON	2004/12/08 11:44
S14	1	statement near8 ((logical near6 (condition and parameter)) and state)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/08 11:44
S15	2	statement same ((logical near6 (condition and parameter)) and state)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/08 11:44
S16	0	(statement or code) same (logical near6 (condition and paremeter)) same state	USPAT	OR	OFF	2004/12/14 18:45
S17	0	(statement or code) same (logical near6 (condition and paremeter)) same state	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 18:46
S18	26383	(statement or code) same (condition) same state	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 18:47


S19	0	((statement or code) same (condition) same state) same ((html or xml) near6 parser)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 18:47
S20	0	((statement or code) same (condition) same state) same ((html or xml) near6 pars\$3)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 18:47
S21	55	((statement or code) same (condition) same state) and ((html or xml) near6 pars\$3)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 18:50
S22	27	((statement or code) same (condition) same logic\$3 same state) and ((html or xml) near6 pars\$3)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 19:16
S23	1211	xml near6 parser	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 19:17
S24	2	(xml near6 parser) same condition same state same (parameter or attribute)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 19:18
S25	1743	((insert\$4 or state) adj4 statement)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 21:56
S26	41	((insert\$4 and state) adj4 statement)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 21:56

S27	5	(insert\$4 same ((condition\$3 and state) adj4 statement))	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 22:00
S28	92	(((condition\$3 and state) adj4 statement))	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 22:01
S29	0	(((condition\$3 and state) adj4 statement)) same xml	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 22:01
S30	4	(((condition\$3 and state) adj4 statement)) and (xml same pars\$3)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 22:02
S31	7	(((condition\$3 and state) adj4 statement)) and (xml)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:24
S32	1	(((condition\$3 and state) adj4 statement)) same parameter	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:25
S33	1	((condition\$3 adj4 statement) same parameter) same (state near4 statement)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:35
S34	24	(condition\$3 adj4 (code or statement) same parameter) same (state near4 (code or statement))	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:31

S35	235	insert\$3 same statement same pars\$3	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:32
S36	10	insert\$3 same statement same pars\$3 same xml	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:32
S37	12	(condition\$3 same parameter) same (state) near4 statement	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:38
S38	1	((condition adj statement) near9 parameter) and (state adj statement)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:39
S39	1	((condition adj statement) same parameter) and (state adj statement)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:39
S40	1	((condition\$3 adj statement) same parameter) and (state adj statement)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:40
S41	2	((condition\$3 or state) adj statement) same parameter) and (state adj statement)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:41
S42	137	((condition\$3 or state) adj statement) same parameter)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:41

S43	1	(((condition\$3 and state) adj statement) same parameter)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:41
S44	248	(((condition\$3 and state) same statement) same parameter)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:41
S45	36104	(((condition\$3 and state) near8statement) same parameter)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/14 23:41
S46	19	(((condition\$3 and state) near8 statement) same parameter)	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/15 00:35
S47	1	source-driven and form-independent	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/15 00:37
S48	19	dynamic near4 content near4 resolution	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/15 00:42
S49	235	insert\$3 same statement same pars\$3	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/15 00:43
S50	116	(insert\$3 near6 statement) same pars\$3	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/15 00:43

S51	87	(insert\$3 near3 statement) same pars\$3	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/15 00:43
S52	14	(insert\$3 adj statement) same pars\$3	US-PGPUB; USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/15 00:43
S53	1	(insert\$3 adj statement adj pars\$3)	USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/15 23:52
S54	7	(insert\$3 adj6 statement adj6 pars\$3)	USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 00:55
S55	0	replace\$4 near6 by near6 (value and reference)	USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 00:56
S56	543	replace\$4 adj6 (value and reference)	USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 00:57
S57	248	replaced adj6 (value and reference)	USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 00:57
S58	186	replaced adj4 (value and reference)	USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 00:58
S59	74	replaced adj2 (value and reference)	USPAT; USOCR; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/12/16 00:58


[Web](#)
[Images](#)
[Groups](#)
[New!](#)
[News](#)
[Froogle](#)
[more »](#)

[Advanced Search](#)
[Preferences](#)

WebResults 1 - 10 of about 101,000 for "**INSERT Statement**". (0.20 seconds)**SQL: INSERT Statement**

The **INSERT statement** allows you to insert a single record or multiple records into a table. ... **SQL: INSERT Statement. The INSERT statement ...**

www.techonthenet.com/sql/insert.htm - [Similar pages](#)

Sponsored Links**SQL Query Builder**

Visually build complete SQL scripts
Access, MS-SQL, Oracle, MySQL
www.superiorsql.com

INSERT Statement

INSERT Statement. The **INSERT statement** adds one or more new rows of data to a database table. ... The following examples show various forms of **INSERT statement**: ...

[https://cwisdb.cc.kuleuven.ac.be/](https://cwisdb.cc.kuleuven.ac.be/ora10doc/appdev.101/b10807/13_elems025.htm)

[ora10doc/appdev.101/b10807/13_elems025.htm](https://cwisdb.cc.kuleuven.ac.be/ora10doc/appdev.101/b10807/13_elems025.htm) - 13k -

[Cached](#) - [Similar pages](#)

INSERT statement

INSERT statement. ... 4 4 4 **INCLUDE** 4 Specifies a list of columns to be included in the intermediate 4 result table of the **INSERT statement**. ...

[publib.boulder.ibm.com/infocenter/](http://publib.boulder.ibm.com/infocenter/db2help/topic/com.ibm.db2.udb.doc/admin/r0000970.htm)

[db2help/topic/com.ibm.db2.udb.doc/admin/r0000970.htm](http://publib.boulder.ibm.com/infocenter/db2help/topic/com.ibm.db2.udb.doc/admin/r0000970.htm) - 36k - [Cached](#) - [Similar pages](#)

INSERT statement

INSERT statement. An **INSERT statement** creates a row or rows and stores them in the named table. The number of values assigned in ...

publib.boulder.ibm.com/infocenter/cldscp10/topic/com.ibm.cloudscape.doc/sqlj40.htm - 5k -

[Cached](#) - [Similar pages](#)

[[More results from publib.boulder.ibm.com](#)]

dBforums - help with insert statement

... Go Back dBforums > Data Access, Manipulation & Batch Languages > ASP > help with **insert statement**. Reply. ... help with **insert statement**. ...

www.dbforums.com/t1073377.html - 66k - [Cached](#) - [Similar pages](#)

dBforums - vb.net sql insert statement that loops and insert ...

... Go Back dBforums > Data Access, Manipulation & Batch Languages > Microsoft.NET > vb.net sql **insert statement** that loops and insert different values. Reply. ...

www.dbforums.com/t1061007.html - 77k - [Cached](#) - [Similar pages](#)

[[More results from www.dbforums.com](#)]

SQL Tutorial [SQL Modification Statements]

... **INSERT Statement.** The **INSERT Statement** adds one or more rows to a table. It has two formats: **INSERT INTO** table-1 [(column-list)] **VALUES** (value-list) and,; ...

www.firstsql.com/tutor4.htm - 11k - [Cached](#) - [Similar pages](#)

FIX: INSERT Statement Incorrectly Conflicts with Constraint


FIX: INSERT Statement Incorrectly Conflicts with Constraint. Article ID, : 279804. Last Review, : October 16, 2003. Revision, : 1.0. This ...


support.microsoft.com/kb/279804/EN-US/ - 7k - Dec 14, 2004 - [Cached](#) - [Similar pages](#)






SQL INSERT Statement

SQL INSERT Statement. PURPOSE: This ... statement. The system field @SQLCODE

INSERT Statement (insert_statement) (SAP Library - MySQL MaxDB ...
INSERT Statement (insert_statement) Locate the document in its SAP Library structure.
 The **INSERT statement** (insert_statement) creates new rows in a table. ...
dev.mysql.com/doc/maxdb/en/34/ee7fb7293911d3a97d00a0c9449261/content.htm - 18k -
Cached - Similar pages






 Search Web
  PageRank
  3 blocked
  AutoFill
  Options

"INSERT Statement" Search

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

<http://www.google.com/search?hl=en&lr=&q=%22INSERT+Statem...> 12/16/04

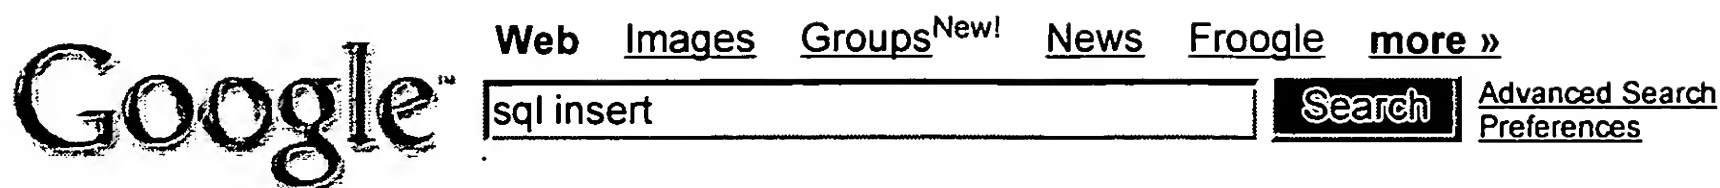

W b

Results 1 - 10 of about 2,700,000 for **sql insert**. (0.17 seconds)**SQL INSERT INTO**

SQL The **INSERT INTO** Statement. previous next The **INSERT INTO** Statement. The **INSERT INTO** statement is used to **insert** new rows into a table. Syntax. ...

www.w3schools.com/sql/sql_insert.asp - 23k - Dec 14, 2004 -

[Cached](#) - [Similar pages](#)

Sponsored Links

SQL Hosting Information

Instant info on **SQL** hosting
Search, compare and research
www.ewoss.com

[See your message here...](#)

SQL INSERT INTO

This **sql** tutorial section introduces the keyword **INSERT INTO**. **Insert** into is used to put data into a table. **SQL** Tutorial. ... **SQL INSERT INTO**. ...

www.1keydata.com/sql/sqlinsert.html - 8k - [Cached](#) - [Similar pages](#)

SQL: INSERT Statement

SQL: INSERT Statement. ... You can determine the number of rows that will be **inserted** by running the following **SQL** statement before performing the **insert**. ...

www.techonthenet.com/sql/insert.htm - [Similar pages](#)

Oracle SQL: Insert with Select and Subquery

... Oracle **SQL: Insert** with Select and Subquery. set feedback off; set pagesize 0; create table foo (a number, b varchar(10), c varchar ...

www.adp-gmbh.ch/ora/sql/insert/select_and_subquery.html - 6k - Dec 14, 2004 -

[Cached](#) - [Similar pages](#)

Oracle SQL: Insert into y returning x

... Oracle **SQL: Insert** into y returning x. The following example is based on autonumbers in Oracle?. set feedback off set serveroutput ...

www.adp-gmbh.ch/ora/sql/insert_into_x_returning_y.html - 7k - Dec 14, 2004 -

[Cached](#) - [Similar pages](#)

[[More results from www.adp-gmbh.ch](#)]

SQL Insert Command

SQL Guide Contents Page. **SQL Insert** Command. This statement is used to **insert** a row of data in a table. All **inserted** values are enclosed ...

www.comptechdoc.org/independent/database/begin/sqlinsert.html - 4k -

[Cached](#) - [Similar pages](#)

SQL INSERT - internet and computer programming, source code, free ...

Home. **SQL** Basic. **SQL** Home. **SQL** Intro. **SQL** SELECT. **SQL** WHERE. **SQL** INSERT. **SQL** UPDATE. **SQL** DELETE. **SQL** Demo. **SQL** Try It. **SQL** Advanced. **SQL** ORDER BY. **SQL** AND & OR. ...

www.slackerhtml.com/SQL-INSERT.htm - 21k - [Cached](#) - [Similar pages](#)

dBforums - vb.net sql insert statement that loops and insert ...

... Go Back dBforums > Data Access, Manipulation & Batch Languages > Microsoft.NET > vb.net **sql insert** statement that loops and **insert** different values. Reply. ...

www.dbforums.com/t1061007.html - 77k - [Cached](#) - [Similar pages](#)

Visual Basic(Microsoft) Databases - SQL INSERT

... Initial Catalog=breakdownsvb1104;" & _ "Integrated Security=SSPI" oconn = "**insert** into brkdetails ... Mario, I use the following for **SQL** statements, it works well ...

www.tek-tips.com/viewthread.cfm?qid=948156&page=1 - 27k - [Cached](#) - [Similar pages](#)

SQL Insert into Multiple Tables

... chris_vine. Registered User. Join Date: Jul 2004. Posts: 17. **SQL Insert** into Multiple Tables. ... **sql INSERT** help: how to **INSERT** from a variable? ...

forums.aspfree.com/t43024/s.html - 70k - [Cached](#) - [Similar pages](#)

Goooooooooooooogle ►

Result Page: 1 [2](#) [3](#) [4](#) [5](#) [6](#) [7](#) [8](#) [9](#) [10](#) [Next](#)

 Free! [Google Desktop Search](#): Search your own computer.

[Search within results](#) | [Language Tools](#) | [Search Tips](#) | [Dissatisfied? Help us improve](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2004 Google